




PROFILES CROSS-SECTIONS

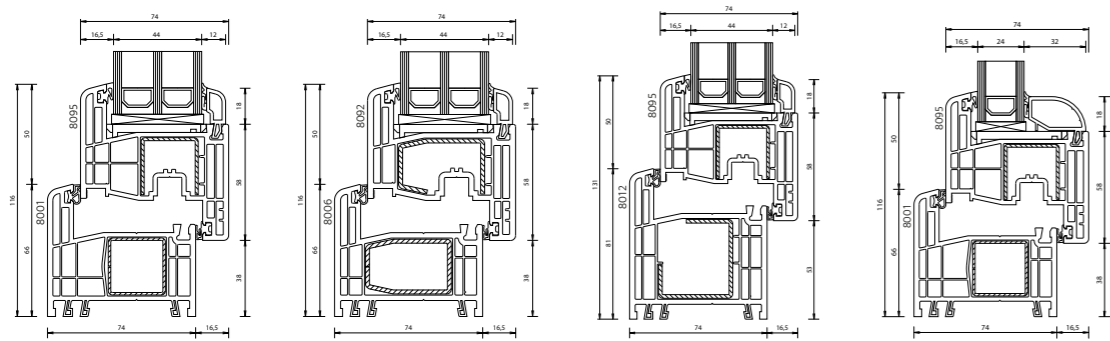

8001 - 8095      8006 - 8092      8012 - 8095      8001 - 8095 rounded glazing bead

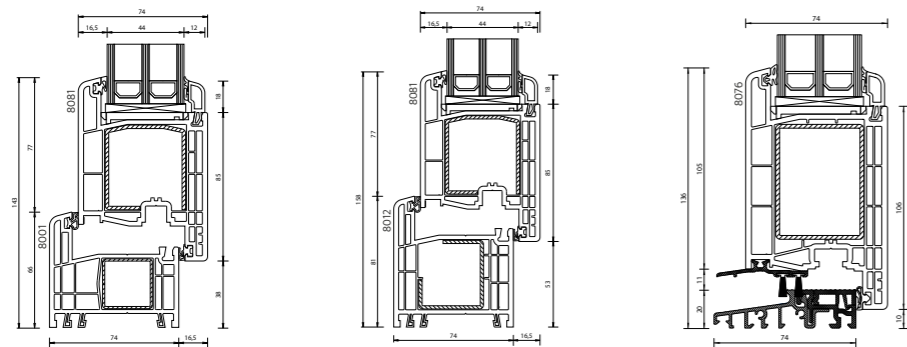

8001 - 8081      8012 - 8081      threshold Alumaster Combi- 8076

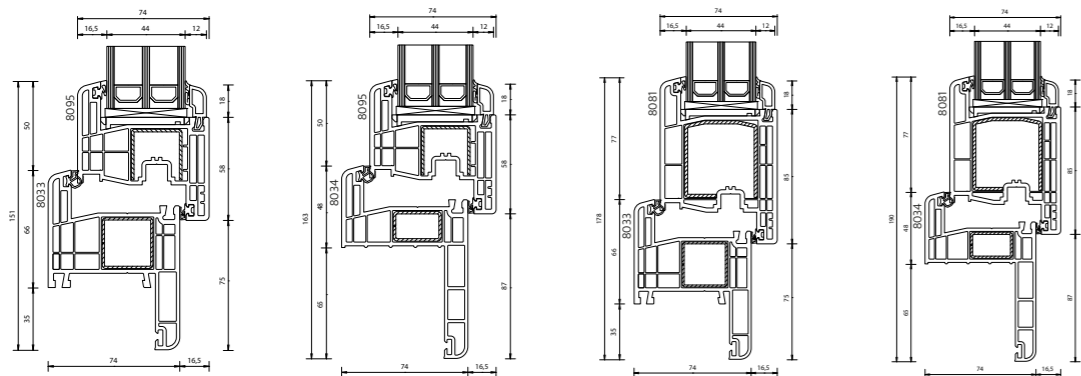


8033 - 8095      8034 - 8095      8033 - 8081      8034 - 8081

f in @ | amex-baczek.com




GLINE 74

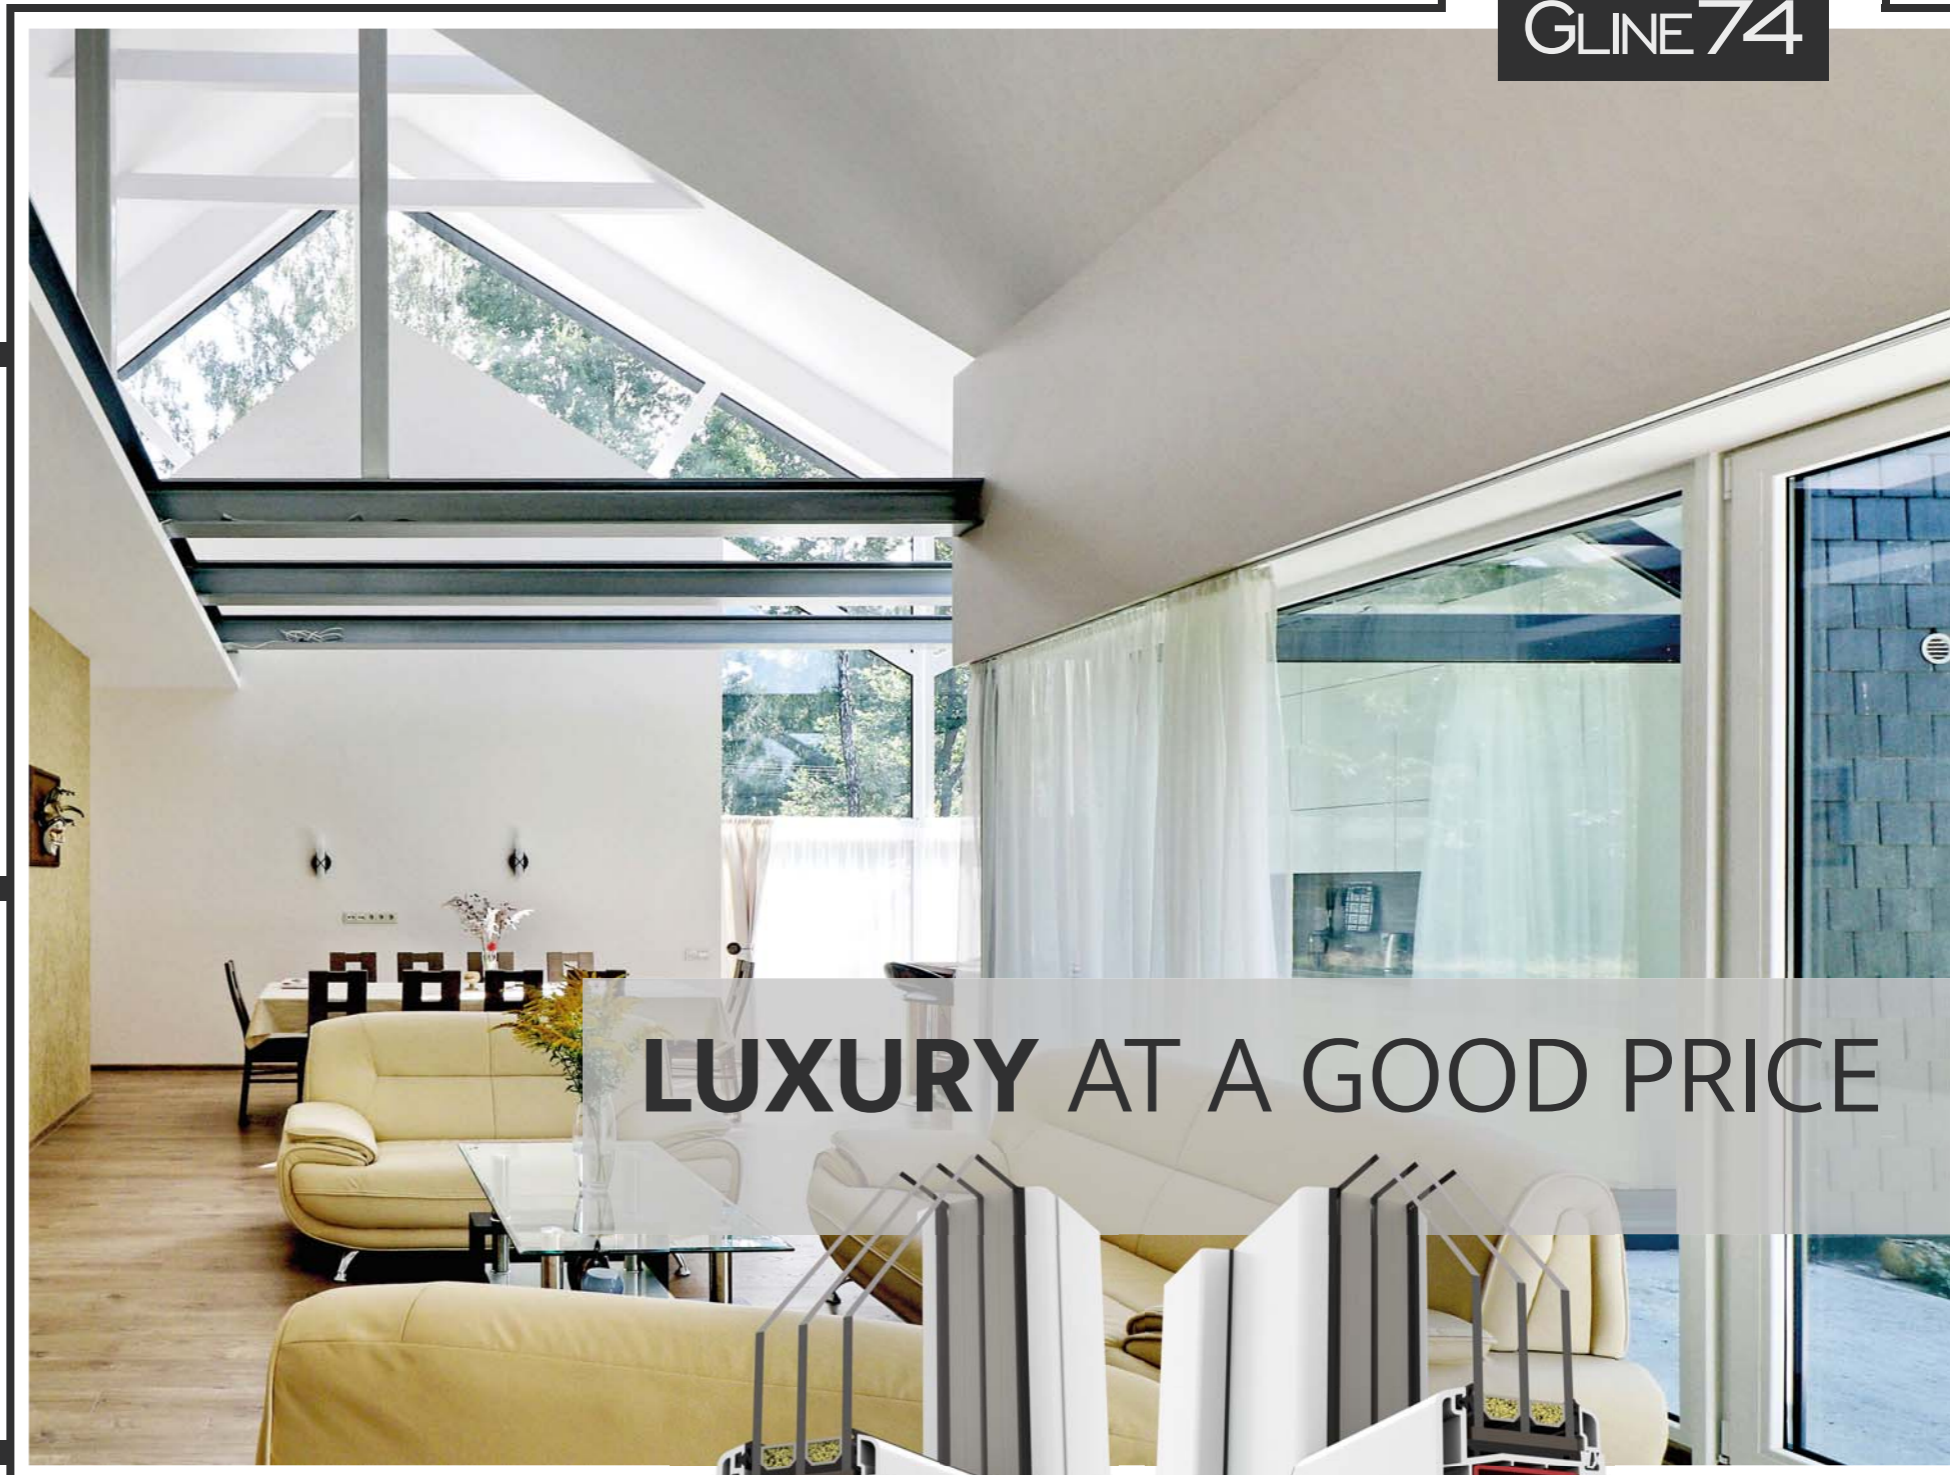

LUXURY AT A GOOD PRICE



„AMEX-BACZEK” SP. Z O. O. SP. K.  
Falknowo 13, 14-240 Susz  
tel. +48 89 648 69 03  
contact@amex-baczek.com  
amex-baczek.com  
NIP 744 14 85 088 REGON 510815144



The information included in this leaflet is for information purposes only. Before purchasing a product, the specification should be verified with the manufacturer or sales representative.

THE SYSTEM PROVIDES **GEALAN** THE FITTINGS PROVIDES **SIEGENIA** brings spaces to life





# GLINE 74



PROFILE: 8001 - 8095 COLOR: white CORE: white




PROFILE: 8006 - 8092 COLOR: anthracite CORE: white

<b>74</b> mm	<b>PROFILE DEPTH</b>	<b>6/5*</b>	<b>CHAMBER IN A FRAME</b>	<b>2</b>	<b>NUMBER OF GASKETS</b>
<b>44</b> mm	<b>GLASS PACKAGE</b>	<b>6/5*</b>	<b>CHAMBER IN A WIND</b>	<b>0,91</b> W/m <sup>2</sup> K**	<b>HEAT TRANSFER COEFFICIENT U<sub>w</sub></b>

\* white windows have 6 chambers in the frame and wing, colorful windows have 5 chambers in the frame and wing  
\*\* the U<sub>w</sub> coefficient calculated by the calculation method for the reference window with parameters: dimension: 1230 x 1480 mm, glass package: 4/16/4/16/4 + CR1 U<sub>w</sub> = 0,53 W/m<sup>2</sup>K

## POSSIBILITIES OF IMPLEMENTATION

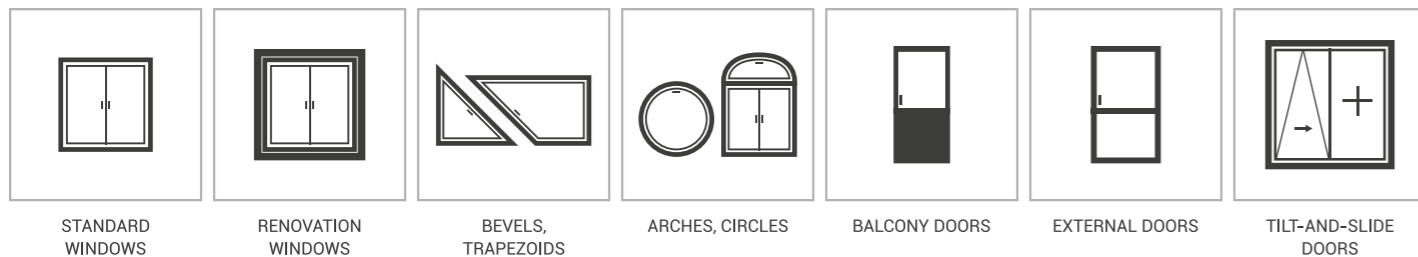


## REALWOOD VENEERS

Realwood veneers perfectly image genuine wood grain. They are significantly less glossy than standard veneers. As a result, they give G-LINE 74 windows a fresh and natural look.



## STANDARD VENEERS COLORS + more than 50 colors in the non-standard palette

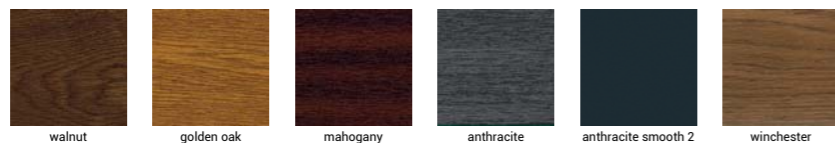

The actual colours may differ from the printed ones. Window profiles can be covered with foil, lacquered or colored in mass. For full colour palette ask our sales representatives or visit amex-baczek.com.

## EXAMPLE OF COLORS AND HANDLE TYPES



For details regarding colors ask the PVC Commercial Department at Amex-Bączek or our Trading Partners.

## HANDLES TYPES



For the G-LINE 74 window system we offer the Medos DUBLIN or HOPPE Atlanta handles in the Secustik® technology. We offer standard handles and handles with keys or buttons.


### THE COLORS OF HANDLES Medos

- > F1 (s) (b)
  - > F3 (s) (b)
  - > F4 (s) (b)
  - > F9005 (s) (b)
  - > F9 (s) (b)
  - > gold
  - > inox (b)
  - > RAL 7016
  - > RAL 8019
  - > RAL 8077
  - > RAL 9001
  - > RAL 9005
  - > RAL 9016
  - > silver
- (s) - sandblasted (b) - brushed

### THE COLORS OF HANDLES HOPPE

- > F9016
- > F8707
- > F1
- > F4
- > F9

Our windows have Siegenia TITAN AF fittings. Even if it is standard version, they guarantee a high level of safety. Additional anti-burglary protection is provided - in combination with a rotary mushroom head cam - by a special burglary resistant hitch, enables raising the window safety class to the appropriate level.

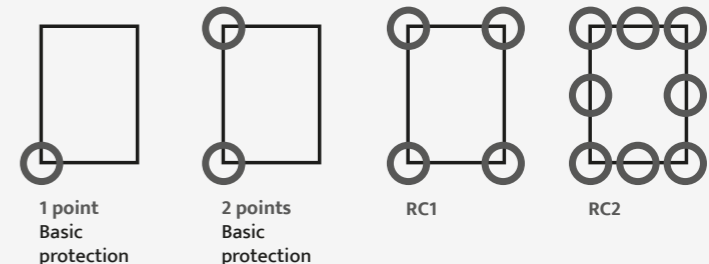

<p><b>Rotary mushroom head cam with integrated height adjustment</b></p> <p>Though compact, it combines plentiful of advantages: it ensures simpler and perfectly precise installation; self-reliantly equals fitting play tolerances and significantly limits the need to perform adjustment during production, installation and handling; automatically adjusts to changing operating conditions, e.g. temperature; ensures always the optimally set closing system; prevents from time wasting and costly complaints.</p>	<p><b>Stay system</b></p> <p>It enables closing and tilting of balcony windows and doors in an even simpler and more comfortable way; the large closing range on the air latch also allows for smooth, though effortless closing of very wide delicate sashes; positioning in the tilted position by means of a braking bushing; integrated anti-slam protection in the tilted position; lock in the tilted position preventing from incorrect window handling.</p>	<p><b>Anti-pry latch</b></p> <p>Perfect mix of plastic and steel materials, ensuring the so far unreachable low friction level; no-nonsense extension to RC2 thanks to very simple templates / software and identical catch positions also in case of movable posts and higher security levels; attractive design of standard and anti-pry catches.</p>	<p><b>Balcony latch</b></p> <p>During closing of a door a leaf is pulled by means of a latch, resulting in keeping a leaf in the latched position; in the standard version you can adjust the wedging force and friction level is low; in the comfort version door can be unblocked in the tilted position; a frame catch works together with a latch, resulting in no need to use any additional elements.</p>	<p><b>Corner</b></p> <p>The corner with a finger leaf lift and lock of incorrect handle use. Rollers available even at the basic anti-burglary protection level, elegant design of fitting thanks to use of catches in the unified form.</p>	<p><b>Covered hinge side (optional)</b></p> <p>Covered hinges ensure subtle window appearance and seamless sealing ensures perfect thermal and acoustic insulation. Several adjustment options allow to maintain easy sash operation for a long time, while the lower hinge is protected against staining by means of a correctly selected shield.</p>
--	---	---	---	--	--